



PT SOLUSI INDO PERDANA
BE PRODUCTIVE, BE SOLUTIVE FOR MATERIAL HANDLING

SANY MARINE HEAVY INDUSTRY

SRSC45V3

SANY Fuel Reach Stacker



1

fuel consumption reduced 15%
longer life filter, lower maintenance cost
energy-saving LED light

2

Deutz D12 engine, more powerful, power
increase by 6%

3



Equipped with proportional micro-motion
technology, full proportional control of
container matching

► Product Parameters

Technical Parameter		
ITEM	UNIT	SRSC45V3
Max. Lifting speed (0/full load)	mm/s	420/250
Max. Lowering speed (0/full load)	mm/s	360/300
Max. Traveling speed (0/full load)	km/h	25/21
Gradeability (0/full load)	%	39/32
Hydraulic system working pressure	bar	260
Overall weight	t	71
Rated load	t	45
Stack layer	-	5
Max. Lift height standard	mm	15100
Max. Boom elevation	deg	0-60
Overall length L	mm	11320
Wheel base L1	mm	6042
Overall height H (retract/extend)	mm	4770
Min. Ground clearance H1	mm	350
Overall width W	mm	6053-12185
Counterweight sideways E	mm	-
Front gauge T1	mm	3033
Rear gauge T2	mm	2790
Min. Turning radius R	mm	8000
Aisle width for 20'container A1	mm	11300
Aisle width for 40'container A2	mm	13600

Configuration Parameter		
CONFIGURATION	UNIT	SRSC45V3
Engine	Type	-
	Rated capacity	Kw/rpm
	Max torque	Nm/rpm
	Emission standard	-
Transmission type		-
Drive axle type		-
Main valve		-
Main pump		-
Spreader	Model	-
	Lateral move	mm
	Rotate angle	deg
	Tilt angle	deg
	Self-weight	t
	Suitable fo	-
Tires		-

► Dimensions

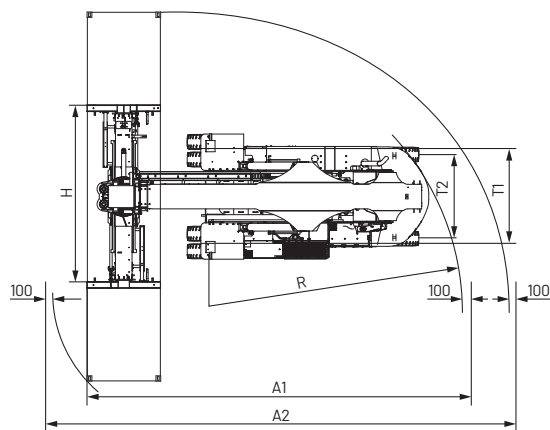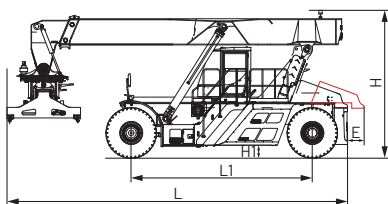

PT SOLUSI INDO PERDANA
BE PRODUCTIVE, BE SOLUTIVE FOR MATERIAL HANDLING

Head Office :
Ruko Pesona Gintung Residence, Blok AA No. 06, Cempaka Putih, Ciputat Timur, Tangsel 15412

Branch Office :
Jl. Sultan Hasanudin KM.41 No. 2 Blok E24, Tambun, Kec. Tambun Selatan, Kab. Bekasi – 17510

Email :
sales@alatberatsip.co.id

Hotline Service :
(021) 7433477 / 087720101020