

SRSC45V4

SANY Fuel Reach Stacker



▶ 1

Cummins QSL9 engine, meet the US T4F emissions.

▶ 2

Equipped with WPT and PPS functional spreader to meet various working scenarios.

▶ 3



DANA TE32 transmission, fully electronically controlled proportional shift without impact, more comfortable

► Product Parameters

Technical Parameter		
ITEM	UNIT	SRSC45V4
Max. Lifting speed (0/full load)	mm/s	480/250
Max. Lowering speed (0/full load)	mm/s	360/300
Max. Traveling speed (0/full load)	km/h	25/21
Gradeability (0/full load)	%	39/32
Hydraulic system working pressure	bar	260
Overall weight	t	72
Rated load	t	45
Stack layer	-	5
Max. Lift height standard	mm	15100
Max. Boom elevation	deg	0-60
Overall length L	mm	11340
Wheel base L1	mm	6053
Overall height H (retract/extend)	mm	4770
Min. Ground clearance H1	mm	350
Overall width W	mm	6053-12185
Counterweight sideways E	mm	-
Front gauge T1	mm	3033
Rear gauge T2	mm	2790
Min. Turning radius R	mm	8000
Aisle width for 20'container A1	mm	11300
Aisle width for 40'container A2	mm	13600

Configuration Parameter		
CONFIGURATION	UNIT	SRSC45V4
Engine	Type	-
	Rated capacity	Cummins QSL9 T4F
	Max torque	kW/rpm 261/2100
	Emission standard	Nm/rpm 1627/1500
Transmission type		-
Drive axle type		15.7TE30
Main valve		-
Main pump		Kessler D102
Spreader	Model	-
	Lateral move	Parker
	Rotate angle	-
	Tilt angle	SDJ450H-R1
	Self-weight	mm ±800
	Suitable fo	deg 105/-195
Tires		t 7.1
		- ISO20'/40'/45'container
		- 18.00-25

► Dimensions

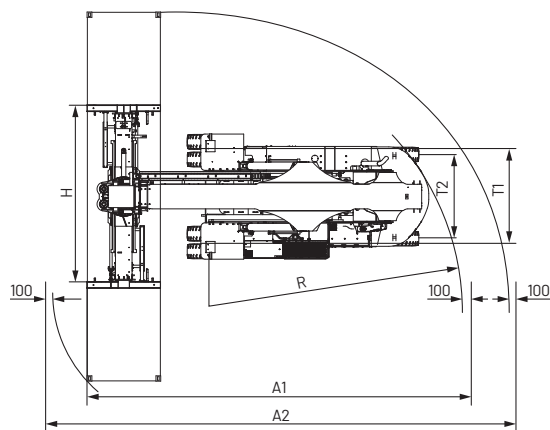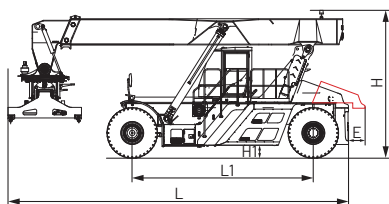

PT SOLUSI INDO PERDANA

BE PRODUCTIVE, BE SOLUTIVE FOR MATERIAL HANDLING

Head Office :
Ruko Pesona Gintung Residence, Blok AA No. 06, Cempaka Putih, Ciputat Timur, Tangsel 15412

Branch Office :
Jl. Sultan Hasanudin KM.41 No. 2 Blok E24, Tambun, Kec. Tambun Selatan, Kab. Bekasi – 17510

Email :
sales@alatberatsip.co.id

Hotline Service :
(021) 7433477 / 087720101020